


| Visual Characteristics                     | Lynx 3                                     | Lynx 5           | Lynx 6         | Lynx 7         | Lynx 10        |
|--|--|------------------|----------------|----------------|----------------|
| Pixel pitch:                               | 3.9 mm                                     | 5.2 mm           | 6.25 mm        | 7.8 mm         | 10.41mm        |
| Brightness:                                | 1500 nit                                   | 1800 nit         | 2400 nit       | 5500 nit       | 5500 nit       |
| Refresh frequency:                         | 1200 Hz                                    | 1200 Hz          | 1600 Hz        | 2000 Hz        | 2000 Hz        |
| Gray scale :                               | 65536 level                                | 65536 level      | 65536 level    | 65536 level    | 65536 level    |
| Pixel configuration:                       | Black SMD (3in1)                           | Black SMD (3in1) | SMD (3in1)     | SMD (3in1)     | SMD (3in1)     |
| Colors:                                    | 281 Trillion                               | 281 Trillion     | 281 Trillion   | 281 Trillion   | 281 Trillion   |
| Viewing angle (H/V):                       | 150°/150°                                  | 140°/140°        | 140°/140°      | 140°/140°      | 140°/140°      |
| Ingress protection (Front/Rear):           | IP40/IP21                                  | IP40/IP21        | IP40/IP21      | IP65/IP65      | IP65/IP65      |
| Power cons. per sq.m. (max/avg):           | 720/240 W                                  | 540/180 W        | 600/200 W      | 760/260 W      | 510/170 W      |
| Modular Characteristics                    |  |                  |                |                |                |
| Cabinet size (WxHxD):                      | 500x500x105 mm                             | 500x500x105 mm   | 500x500x105 mm | 500x500x110 mm | 500x500x110 mm |
| Cabinet weight:                            | 10.5 kg                                    | 10.5 kg          | 9.8 kg         | 11.2 kg        | 10.5 kg        |
| Cabinet material:                          | Cast aluminum                              | Cast aluminum    | Cast aluminum  | Cast aluminum  | Cast aluminum  |
| Pixel matrix per cabinet:                  | 128x128 dot                                | 96x96 dot        | 80x80 dot      | 64x64 dot      | 48x48 dot      |
| Environment                                |  |                  |                |                |                |
| Connector                                  | Neutrik                                    |                  | Harting        |                |                |
| Input voltage (AC):                        | 110 ~ 240 V                                |                  |                |                |                |
| Operating temperature :                    | -20 ~ +40 °C                               |                  | -20 ~ +50 °C   |                |                |
| Signal input format(with video processor): | AV, S-Video, VGA, DVI, YPbPr, HDMI, SDI,DP |                  |                |                |                |
| Control distance:                          | CAT5 cable:< 100 m Single fiber:< 10 km    |                  |                |                |                |

★ PIXELIGHT - Nology Group. reserves the right to modify product design, specifications, and parameters without further notice. Photos are used for illustration purpose only as products may differ from these photos. All rights reserved by Nology Group France.

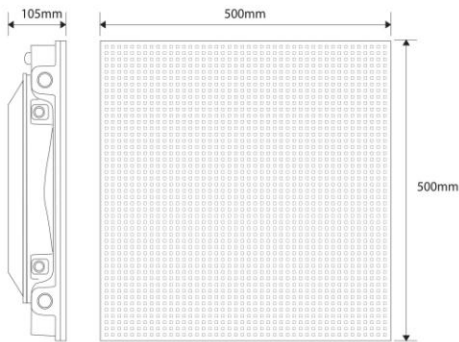

Cabinet dimension

**Applications:**

Outdoor/indoor stage,TV station,concert,theme park and exhibitions.



**LYNX series** — Modules vidéo LED NG  
— Specially designed for stage rental



Super slim



Light weight



Easy installation



High-definition



Low-noise